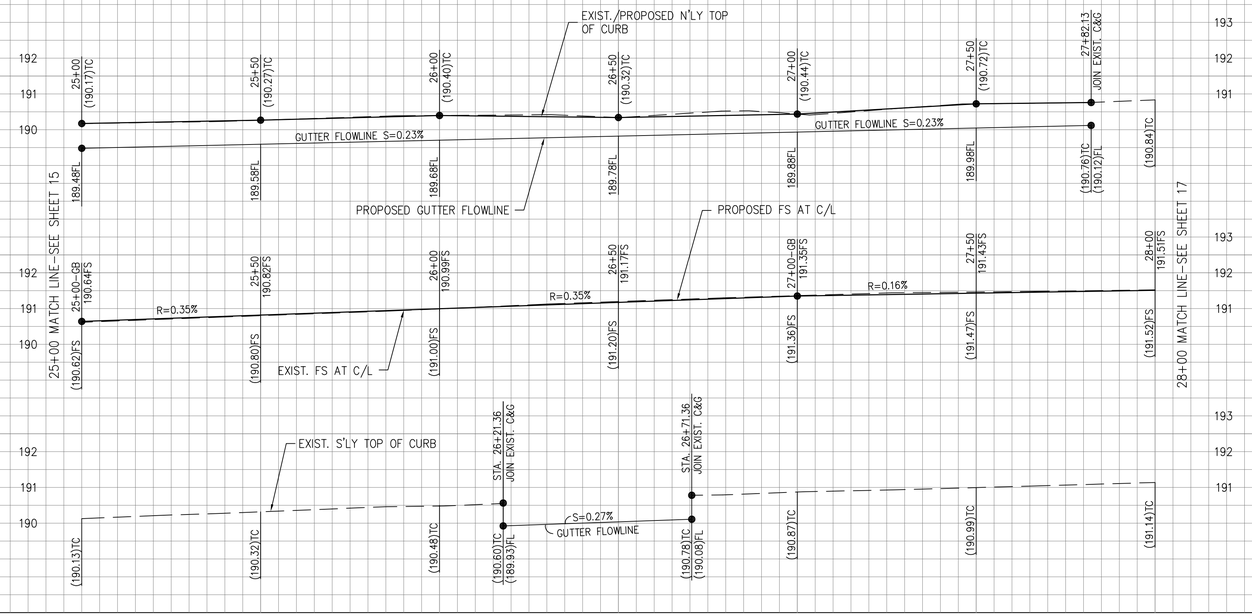

CITY OF ANAHEIM ELECTRICAL NOTE

THERE ARE EXISTING 69KV, 12KV AND STREETLIGHT OVERHEAD AND UNDERGROUND ELECTRICAL FACILITIES WITHIN THE PROJECT'S BOUNDARY. PLEASE PROTECT ALL ABOVEGROUND AND UNDERGROUND ELECTRICAL FACILITIES IN PLACE AND CONTACT UTILITY INSPECTOR JEFF ROBISON AT 714-292-8881 PRIOR TO WORKING WITHIN PROXIMITY TO ENERGIZE ELECTRICAL FACILITIES.

ANY ADJUSTMENTS OF ELECTRICAL PULLBOXES AND VAULTS TO FINAL GRADE, PLEASE COORDINATE WITH UTILITY INSPECTOR AT LEAST 48 HOURS PRIOR TO THE PLANNED WORK. MAINTAIN ALL CLEARANCES PER GENERAL ORDER 95 AND 128. ANY PROPOSED ELECTRICAL PULLBOXES/VAULTS/POLES REQUIRING RELOCATION REQUIRED, PLEASE CONTACT VINH TRAN AT 714-765-4273.

PROFILE SCALE	
HORIZ.	1"=20'
VERT.	1"= 2'

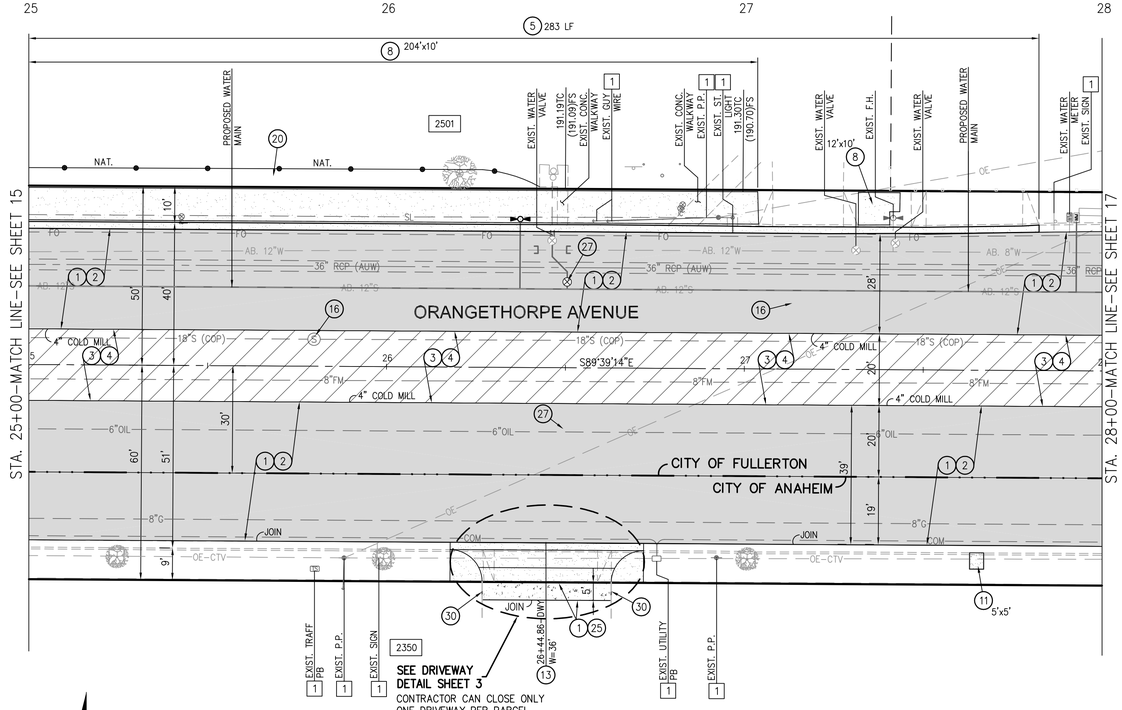

GRAPHIC SCALE

20 0 10 20 40

(IN FEET)

1 inch = 20 ft.

LEGEND

- 2" COLD MILL AND 2" AC OVERLAY
- 4" AC INCLUDES 2" AC SURFACE COURSE
- 7" AC INCLUDES 2" AC SURFACE COURSE OVER 14" CLASS II AB

CONSTRUCTION NOTES

1. EXCAVATE FOR PROPOSED STRUCTURAL SECTION AND IMPROVEMENTS.
2. CONSTRUCT 7" AC, INCLUDED 2" THICK ARHM SURFACE COURSE OVER 14" CLASS II AB.
3. COLD MILL 4" THICK EXISTING AC PAVEMENT.
4. CONSTRUCT 4" AC, INCLUDES 2" THICK ARHM SURFACE COURSE.
5. REMOVE AND RECONSTRUCT CURB & GUTTER PER CITY OF FULLERTON STD PLAN NO. 120, TYPE A. (VARIABLE CF) TO MATCH EXIST. TOP OF CURB.
8. CONSTRUCT CONC. SIDEWALK PER CITY OF FULLERTON STD PLAN NO. 122.
11. REMOVE EXIST. IMPROVEMENTS AND RECONSTRUCT SIDEWALK PER CITY OF ANAHEIM STD PLAN 110-B.
13. REMOVE AND RECONSTRUCT DRIVEWAY APPROACH PER CITY OF ANAHEIM STD PLAN 115-B. CONCRETE TO BE HIGH EARLY STRENGTH CONCRETE MIX W/COMP. STRENGTH OF 3000 PSI IN 24 HOURS.
16. ADJUST EXIST. MANHOLE TO GRADE PER CITY OF FULLERTON STD PLAN 204.
20. REGRADE AND REPLACE DROUGHT TOLERANT LANDSCAPING TO MATCH EXISTING. (FEATHER TO JOIN EXISTING)
25. CONSTRUCT 6" PCC OVER NATIVE. CONCRETE TO BE HIGH EARLY STRENGTH CONCRETE MIX W/COMP. STRENGTH OF 3000 PSI IN 24 HOURS.
27. ADJUST EXIST. WATER VALVE TO GRADE.
30. REMOVE AND RECONSTRUCT CURB PER CITY OF ANAHEIM STD PLAN 120, TYPE C, 6" CF.

DISPOSITION NOTE

[1] PROTECT IN PLACE

THESE PLANS WERE PREPARED UNDER THE SUPERVISION OF:

REGISTERED PROFESSIONAL ENGINEER SURRENDER M. DEWAN NO. 34559 Exp.9/30/25 CIVIL STATE OF CALIFORNIA

DATE

REVISIONS				INITIALS	DATE
NUMBER	DESCRIPTION	DATE	DRAWN	NC	04/24
			DESIGNED	SD	04/24
			REVIEWED	–	–
			STREET		
			SEWER		
			DRAINAGE		
			WATER		
			TRAFFIC		
			UTILITY/ELEC		
			LANDSCAPE		
			FACILITIES		
			GENERAL ENG		
			DESIGN ENG		
			INSPECTION		
			PARKS & REC		
			AS-BUILT		

CITY OF FULLERTON
PUBLIC WORKS DEPARTMENT

ORANGETHORPE AVENUE RECONSTRUCTION PROJECT
CIP PROJECT

STREET IMPROVEMENTS-ORANGETHORPE AVE
FROM STA. 25+00 TO STA. 28+00

APPROVED: _____ ACCEPTED: _____

DATE CITY ENGINEER/ASSISTANT PUBLIC WORKS DIRECTOR — DATE PUBLIC WORKS DIRECTOR

SCALE: 1" = 20' — SHEET 16 OF 21 SHEETS

B.M.: CITY OF FULLERTON BM NO.: 35-37 ELEV = 173.90' P.K. NAIL IN LEAD, N.E. COR. RAYMOND AND WILSHIRE, E. CURB OF RAYMOND, 1' N. OF E.C.R. — FILE: 7082

CIP 44062 - ORANGETHORPE AVENUE INFRASTRUCTURE IMPROVEMENTS